

CENTURION™


Independent High Level Overfill Alarm System

CENTURION™ is a high level & overfill alarm system designed in compliance with USCG & IMO requirements for tankships. Electrically independent alarm systems for both 95% & 98% tank levels are housed in the CENTURION™ controller in the cargo control room.

Level detection is carried out by MM500™ stainless steel float switches which are offered in either dual or single (overflow) versions. Optionally we offer the MM502™ ultrasonic switch, which has no moving parts and is also available in dual or single versions.

Local audio/visual alarm indication is provided for each tank together with relay contacts for remote alarm annunciation.

- Stainless steel / weatherproof alarms
- Intrinsically safe
- Complies with USCG, IMO and general Class rules
- Fully checkable at sensor head
- Worldwide service, commissioning and back-up

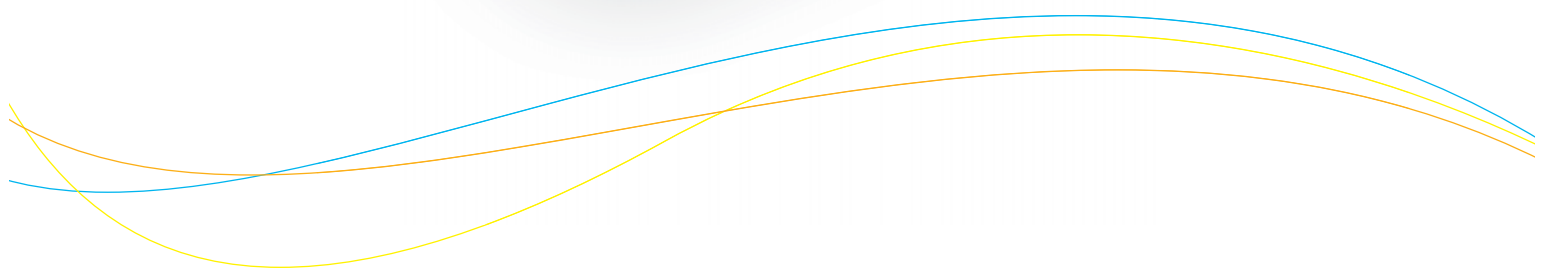

CENTURION™

Specifications

Control Panel

Inputs	<ul style="list-style-type: none"> • 24No. switched inputs
Indicators	<ul style="list-style-type: none"> • 1No. Red LED per input, Green power LED, common Amber fault alarm LED
Environmental Data	<ul style="list-style-type: none"> • -10°C to + 50°C, 0-90% RH, IP54
Dimensions	<ul style="list-style-type: none"> • 296mm(W) x 260mm(H) x 140mm(D)
Fixing Detail	<ul style="list-style-type: none"> • 4No. M6 appropriate fasteners (4 No. M4 fasteners for console mounting)
Weight	<ul style="list-style-type: none"> • 3.6 kg
Cable Entry	<ul style="list-style-type: none"> • Top, bottom, or rear
Alarm Relays	<ul style="list-style-type: none"> • 4No. SPCO rated 5A @ 230V ac latched until reset, SPCO mains fail/fault relays rated 5A @ 230V ac
Audible Alarm	<ul style="list-style-type: none"> • 85dB(A) @ 30cm
Power Supply	<ul style="list-style-type: none"> • 230V ac/ 110V ac and/ or 24V dc alarms, fully latched relays, remote re-set front cover lock

MM500™ Dual Float Level Switch

Material	<ul style="list-style-type: none"> • 316SS float switch
Weight	<ul style="list-style-type: none"> • 6kg (Approx)
Maximum Working Pressure	<ul style="list-style-type: none"> • 5 bar
Operating Temperature	<ul style="list-style-type: none"> • -40°C to +150°C
Specific Gravity	<ul style="list-style-type: none"> • Hermetically sealed switch
Ingress Protection	<ul style="list-style-type: none"> • IP68
I.S. Operation	<ul style="list-style-type: none"> • With suitable Zener barrier
Cable Type	<ul style="list-style-type: none"> • 4 –core min 1.5mm², M20 x 1.5P gland

MM502™ Ultrasonic Level Switch

Material	<ul style="list-style-type: none"> • AISI 316SS ultrasonic switch
Weight	<ul style="list-style-type: none"> • 6kg (Approx)
Maximum Working Pressure	<ul style="list-style-type: none"> • 40 bar
Operating Temperature	<ul style="list-style-type: none"> • -40°C to +90°C
Switching Output	<ul style="list-style-type: none"> • Current output (2 wires) On/Off 5mA/ 14mA
Ingress Protection	<ul style="list-style-type: none"> • IP68
I.S. Operation	<ul style="list-style-type: none"> • With suitable galvanic barrier
Cable Type	<ul style="list-style-type: none"> • 4 –core min 1.5mm², M20 x 1.5P gland